




FelixWood

AFRI-KULU DECKING 25X145MM TG - P415

- Afri-kulu Tropical Hardwood (Mukulungu)
- Durability class 1
- FSC 100% certified
- Neat Tong&Groove profile, smooth/smooth (P410)




Red brown

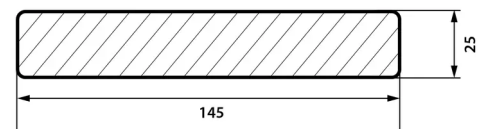

A dense, fine-grained wood from a sustainable source

Afrikulu is a wood from the Congo Basin, from a forest that is fully FSC® certified. Afrikulu has a fine grain, good stability and excellent durability. It is distinguished by its reddish-brown colour, which lightens over time to silver-grey. Its structure is sometimes punctuated by counter-grain. Our Afrikulu decking boards are all kiln-dried to an average of 16% humidity. The boards on offer are either screw or clip-on.

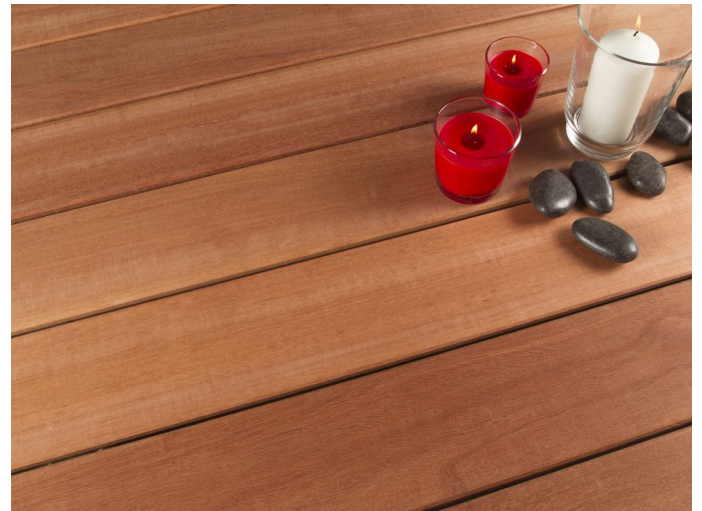

Environment

CERTIFICATION

FSC®-certified

AFRI-KULU DECKING 25X145MM TG - P415



Characteristics

Specie	Afri-kulu	Stability	Low stability
Origin (country)	Congo	Durability for fungus	Very durable
Treatment	No treatment	Durability to termites	Very durable
Main material	Wood	Class of use	Classe 5
Installation type	To screw	Density (kg/m3)	940
	Decking	Modulus of elasticity (Mpa)	17060
Certification	FSC®-certified	Reversible profile	oui
Scientific name	Autranella congolensis	Joist spacing (mm)	500
Botanical family	SAPOTACEAE		
Drying	KD 18 +/-2%		

Logistics Data

REF	EAN CODE	DESIGNATION	WEIGHT (KG)	PACK 1	PACK 2
2160-210	8720039025431	Afri-kulu board 25x145mm x 210cm tongue and groove p415	7.62	126	63
2160-150	8720039023840	Afri-kulu board 25x145mm 150cm Tongue and groove p415	5.44	126	63
2160-180	8720039023857	Afri-kulu board 25x145mm x 180cm Tongue and groove p415	6.53	126	63