



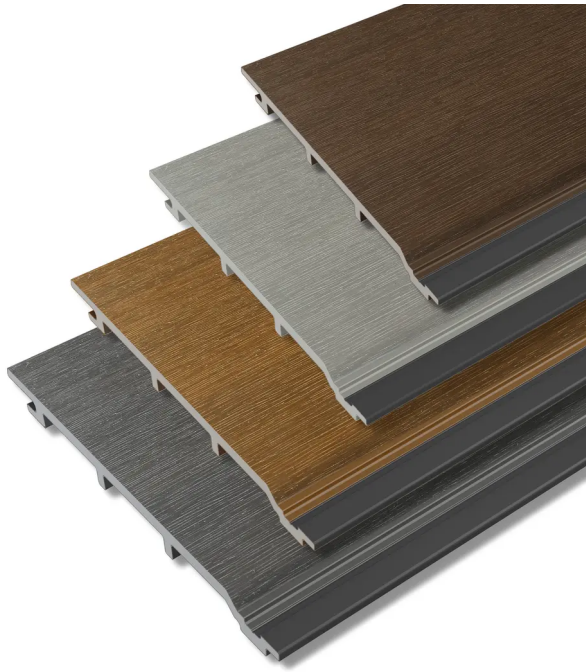

Fiberdeck®

WEO ESSENTIAL CLADDING

- Striking natural wood look
- Rot-proof and stain-resistant
- Multi-chromatic matt colour

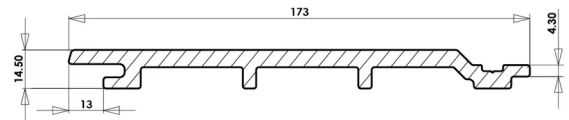

A traditional cladding with beautiful natural looking

WEO ESSENTIAL cladding renovate your facade with charm and elegance. Installed horizontally or vertically, they can be used to create a warm and traditional style or a contemporary and dynamic look. The boards offer unique performance: rot-proof and highly durable, they are perfectly resistant to stains and UV over time. The 4 colours available in the range are all multichromatic with subtle nuances, giving a highly realistic, natural effect.



Environment

LIFETIME	> 20 years
RECYCLED MATERIAL	wpc
END OF LIFE RECYCLABILITY	95 %
CERTIFICATION	FSC®-certified



Characteristics

Main material	WPC
WPC Composition	HDPE : 40% / Wood fibers : 48% / Mineral : 12%
Certification	FSC®-certified
Type of surface coextrusion	Co-extrusion
Pigmentation	Random pigmentation
Way of fixation	Vertical or horizontal installation
Installation type	To screw
Batten spacing (mm)	600
UV resistant	oui
Stain resistant	oui

Fire classification	Euroclasss E
Linear mass (kg/m)	1.64
Anmeldung	MI
Density (kg/m3)	1150
Cert. Product class	W9-1
Certificate group code	FSC TRANSFER
	Cladding


Logistics Data

REF	EAN CODE	DESIGNATION	WEIGHT (KG)	PACK 1	PACK 2
FD1995	3700421819959	WEO ESSENTIAL - Cladding 15x173mm x 3.9m Teak	6.4	156	
FD1996	3700421819966	WEO ESSENTIAL - Cladding 15x173mm x 3.9m Ipe	6.4	156	
FD1997	3700421819973	WEO ESSENTIAL - Cladding 15x173mm x 3.9m Dark Grey	6.4	156	
FD1998	3700421819980	WEO ESSENTIAL - Cladding 15x173mm x 3.9m Light Grey	6.4	156	

Associated products



ALUMINIUM STARTER PROFILE
(2 PCS)



WEO - ALUMINIUM F PROFILE
35X45 MM



WEO® CLADDING - 4,2X32MM
SCREWS (200PCS)