




FelixWood

KAPUR DECKING 27X190MM - P500


- Kapur Tropical Hardwood
- Durability class 2
- FSC 100% certified
- Neat profile, V-grooves (P500)
- Kiln dried: 18% moisture content

Red brown

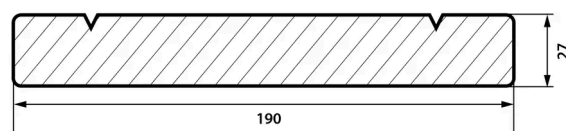

A clear and homogeneous wood

Felixwood Kapur comes from the tropical lowland forests of Indonesia. Well-formed buttresses support their straight, cylindrical bole and the trunk is free of branches up to 30 m, which explains their homogeneity. Renowned for its durability, Kapur is a hardwood used for outdoor construction. It is used as a substitute for Bangkirai. Kapur is initially reddish-brown to orange in colour, and darkens rapidly when exposed to UV light.

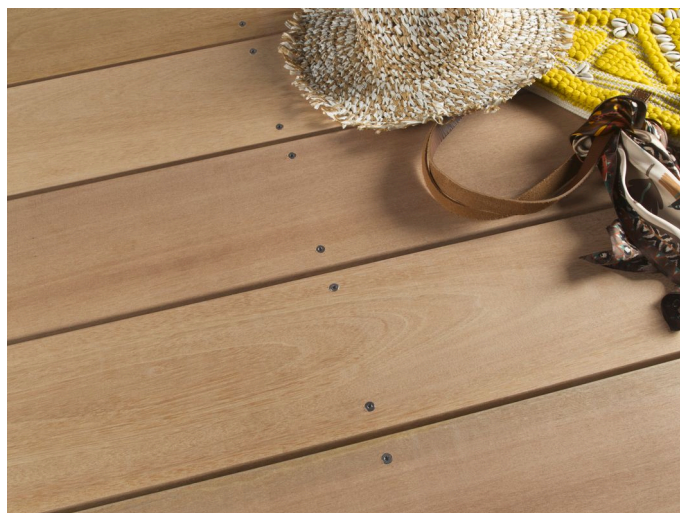

Environment

CERTIFICATION

FSC®-certified

KAPUR DECKING 27X190MM - P500



Characteristics

Specie	Kapur	Stability	Stable
Origin (country)	Indonesia	Durability for fungus	Very durable
Treatment	No treatment	Durability to termites	Very durable
Main material	Wood	Class of use	Classe 4
Installation type	To screw	Density (kg/m3)	740
	Decking	Linear mass (kg/m)	3.8
Certification	FSC®-certified	Modulus of elasticity (Mpa)	16150
Scientific name	Dryobalanops sp.	Reversible profile	oui
Botanical family	DIPTEROCARPACAE	Joist spacing (mm)	500
Drying	KD 18 +/-2%		

Logistics Data

REF	EAN CODE	DESIGNATION	WEIGHT (KG)	PACK 1	PACK 2
2269-274	8720039026506	Kapur board 27x190mm x 274cm p500	11.25	75	25
2269-213	8720039026476	Kapur board 27x190mm x 213cm p500	8.75	75	25
2269-244	8720039026490	Kapur board 27x190mm x 244cm p500	10.02	75	25
2269-305	8720039026513	Kapur board 27x190mm x 305cm p500	12.52	75	25
2269-335	8720039026520	Kapur board 27x190mm x 335cm p500	13.75	75	25
2269-366	8720039026537	Kapur board 27x190mm x 366cm p500	15.03	75	25
2269-427	8720039026551	Kapur board 27x190mm x 427cm p500	17.53	75	25
2269-457	8720039026568	Kapur board 27x190mm x 457cm p500	18.76	75	25
2269-488	8720039026575	Kapur board 27x190mm x 488cm p500	20.03	75	25
2269-396	8720039026544	Kapur board 27x190mm x 396cm p500	16.26	75	25