




Fiberdeck®

PREMIUM DECKING 22,5X138MM

- Massive co-extruded WPC
- Smooth face and woodgrain face
- Hidden fixation with Cobra Hybrid 8-18
- Removable
- Limited maintenance

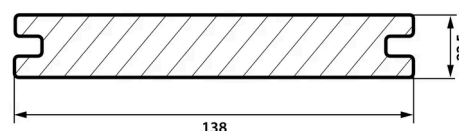

Proven stability and durability

Fiberdeck® Brooklyn Premium composite decking boards have a solid core for greater durability. They are available with 2 useful faces. One is smooth for a contemporary look, the other one shows a wood grain. Both sides are brushed to give a matt surface. The 360° co-extruded protective layer effectively protects the board against knocks and stains. This reduces maintenance to a minimum. Installation is carried out using Cobra® 8-18 removable clips.



Environment

CERTIFICATION

FSC®-certified



Characteristics

WPC Composition	40% HDPE + 60% Wood fibers
Main material	WPC
Installation type	Installation with clips
Certification	FSC®-certified
Type of surface coextrusion	Co-extrusion
Pigmentation	Random pigmentation
Type of profile	2 faces Solid profile
UV resistant	oui
Stain resistant	oui
Density (kg/m3)	1170

Linear mass (kg/m)	3.53
Hardness (Brinell) N/mm2	8.2
Modulus of elasticity (Mpa)	3720
Bending strength	36.3
Thermal expansion	1,15mm / Delta 30°C
Thermal conductivity (W/m*K)	0.19738
Reversible profile	oui
Joist spacing (mm)	400
	Decking
Cert. Product class	W9-1

Logistics Data

REF	EAN CODE	DESIGNATION	WEIGHT (KG)	PACK 1	PACK 2
-----	----------	-------------	-------------	--------	--------

Associated products



SCREW-IN FINISHING BOARD
22,5X138MM SE



COBRA® HYBRID 8-18 (90
CLIPS+SCREWS)



COBRA20 START AND END CLIP
(30PCES + SCREWS)