

PEDESTAL NIVO H50-80MM FOR TILES


- 800 kg load capacity
- Precise adjustment
- UV resistant
- Recycled plastic
- Made in France



Black

Raising and levelling decking slabs

Adjustable pedestals equipped with 4 breakable lugs to support and level 2 cm ceramic or concrete paving. 5 sizes for elevations from 25 mm to 230 mm. Up to 530 mm with stackable 60 mm risers (max 5). Rotary ring for easy and precise adjustment. Each pedestal supports up to 800kg load. Weather and UV resistant. The stable 20cm base prevents sinking into the ground, ideal for use on waterproof flat roofs. Compliant with DTU 43-1 and 51-4.

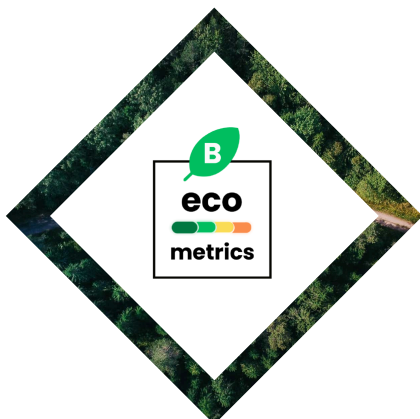

Environment

LIFETIME	> 20 years
GHG EMISSIONS	2.01 (GES)
RECYCLED MATERIAL	Polyethylene
END OF LIFE RECYCLABILITY	100 %



PEDESTAL NIVO H50-80MM FOR TILES

Characteristics

Main material	Polypropylene
Empilable	non
Pedestal type	Tiles pedestal
	50-80
Height adjustable	oui
Max admissible charge (kg)	800
Frost resistant	oui
Resists temperature variations	oui
Chemical resistant	oui
Technical text conformity	Conforme aux DTU 51-4 et 43.1

Fasteners

Logistics Data

REF	EAN CODE	DESIGNATION	WEIGHT (KG)	PACK 1	PACK 2
FD0274	3760178990127	NIVO Pedestal for tiles H50-80mm	0.26	600	60